

## Product Code

# 3150W/X02

Oil Reservoir Pressure Valve  
3/8" M x 3/8" F Pset=1,40bar  
PS = 80 bar



### Product use

The calibrated valves are used where it is necessary to require a differential pressure between the oil reservoir and the compressor crankcase. This differential pressure allows the level oil regulator to be met. Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:


HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

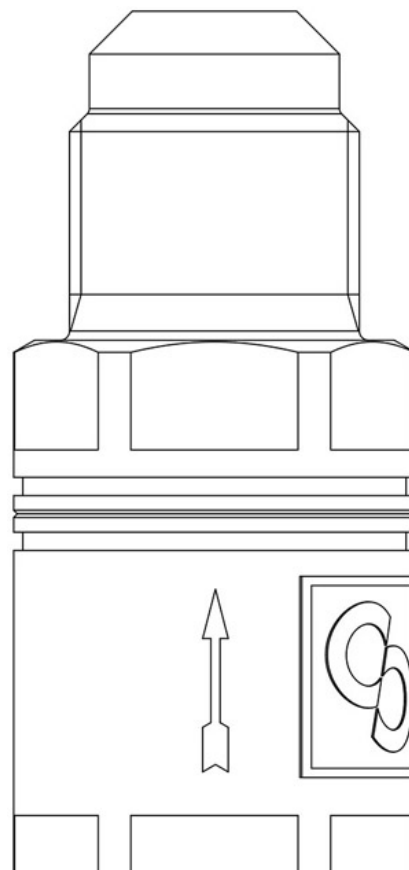

### Product details

**Anschlüsse SAE FLARE IN** 3/8" - F

**Anschlüsse SAE FLARE OUT** 3/8" - M

**Kv [m³/h]** 1,6

**Differenzial Druck [bar]** 1,4

**PS[bar]** 80

**TS[°C] min.** -40

**TS[°C] max.** +150

**Verpackung** 20