

Product Code

4424/25A

Solid Core Drier Shell
3.1/8"-80mm ODS - 88,9W
PS = 32 bar - 470 PSI

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

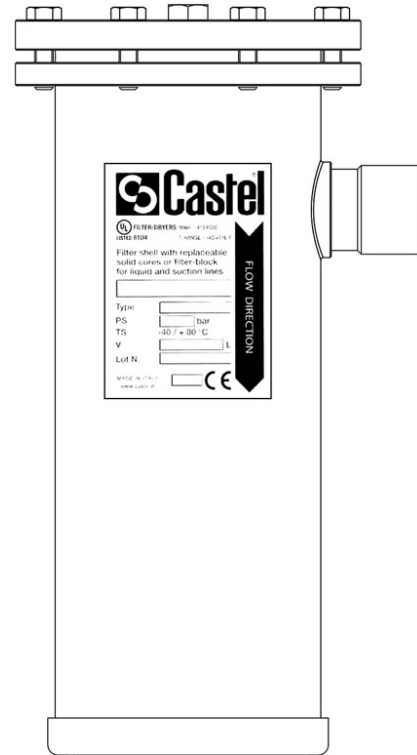

Product details

Katalog Nr Schraubkappe	4424/25A
Anschlüsse ODS Ø [in.]	3.1/8"
Anschlüsse ODS Ø [mm]	80
W Ø [mm]	88,9
Patrontyp	4491/A4491/AA
Patronenanzahl	4
Nominaler rauminhalt [cm ³]	6400
PS[bar]	32
MWP [psi] (1)	470
TS[°C] min.	-40
TS[°C] max.	+80
Verpackung	1

Notes

(1): Übereinstimmung zur UL-Zulassung