

Product Code

4424/34A

Solid Core Drier Shell
4.1/4"-108mm ODS - 114,3W
PS = 32 bar - 470 PSI

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

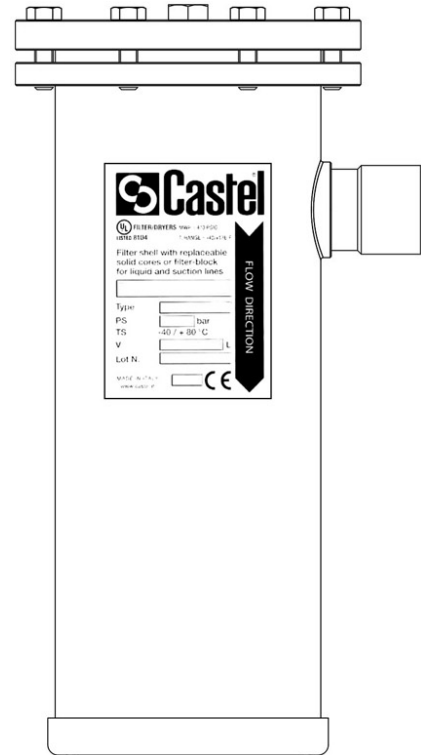

Product details

Katalog Nr Schraubkappe	4424/34A
Anschlüsse ODS Ø [in.]	4.1/4"
Anschlüsse ODS Ø [mm]	108
W Ø [mm]	114,3
Patrontyp	4491/A4491/AA
Patronenanzahl	4
Nominaler rauminhalt [cm ³]	6400
PS[bar]	32
MWP [psi] (1)	470
TS[°C] min.	-40
TS[°C] max.	+80
Verpackung	1

Notes

(1): Übereinstimmung zur UL-Zulassung