


Product Code

**SF411/21B**

Solid Core Drier Shell  
2.5/8" ODS  
PS = 47 bar - 600 PSI

CLASSIC

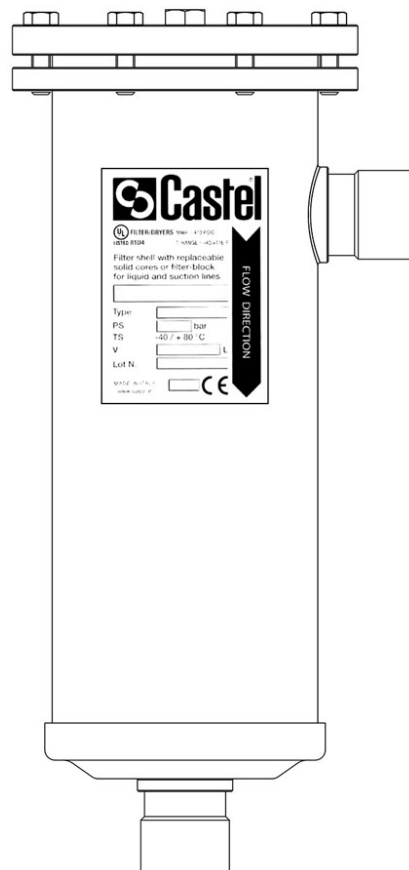

### Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

### Product details

|   |  |
|---|--|
| Anschlüsse ODS Ø [in.]                  | 2.5/8"                                   |
| Anschlüsse ODS Ø [mm]                   | -  |
| Patronentyp                             | 4490/A4490/B4490/AA4490/AB4490/BA4490/BB |
| Patronenanzahl                          | 1  |
| Nominaler rauminhalt [cm <sup>3</sup> ] | 800                                      |
| PS[bar]                                 | 47                                       |
| MWP [psi] (1)                           | 600                                      |
| TS[°C] min.                             | -40                                      |
| TS[°C] max.                             | +80                                      |
| Verpackung                              | 1  |

## Notes

(1): Übereinstimmung zur UL-Zulassung