


## Product Code

# 4412/17AF

Solid Core Drier Shell  
2.1/8"-54mm ODS  
PS = 50 bar - 470 PSI

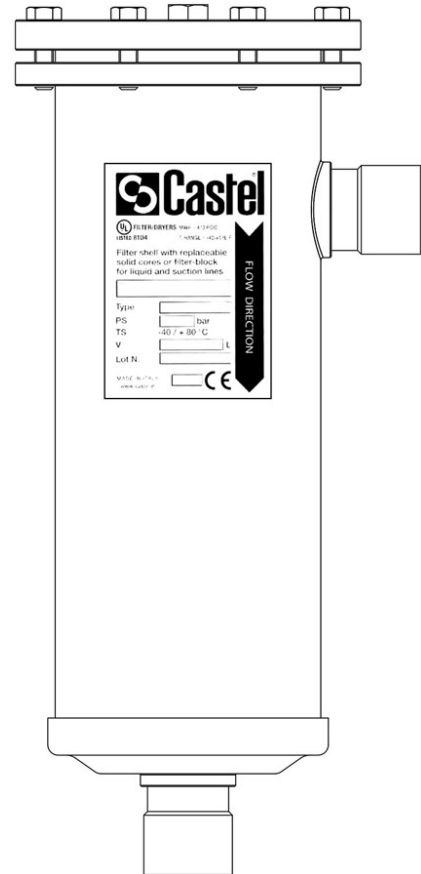

### Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges. Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

### Product details

Katalog Nr Schraubkappe	4412/17AF
Anschlüsse ODS Ø [in.]	2.1/8"
Anschlüsse ODS Ø [mm]	54
W Ø [mm]	60,3
Patronentyp	4490/A4490/B4490/AA4490/AB4490/BA4490/BB
Patronenanzahl	2
Nominaler rauminhalt [cm <sup>3</sup> ]	1600
PS [bar]	50

<b>MWP [psi] (1)</b>	470
<b>TS [°C] min.</b>	-40
<b>TS [°C] max.</b>	+80
<b>Verpackung</b>	1

## Notes

(1) in Übereinstimmung zur UL-Zulassung