


Product Code

DB316/4S

Solid Core Bi-Flow Filter Drier

1/2" ODS

PS = 50 bar - 680 PSI

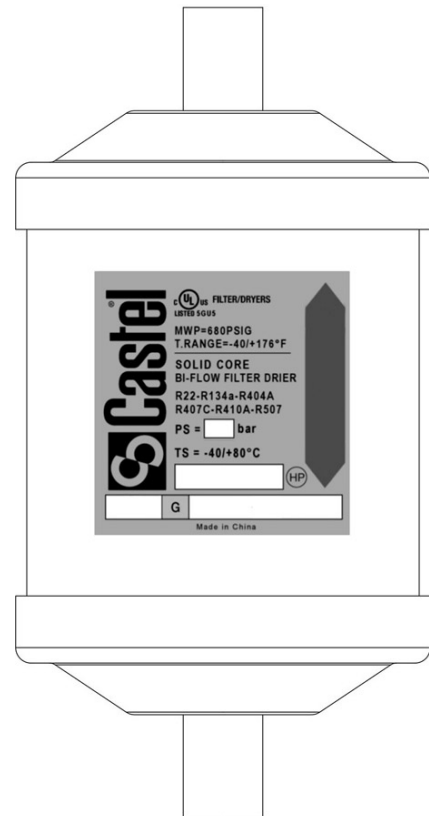

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

HC (R290, R600, R600a, R1270)

Product details

Internationaler code	164S
Anschlüsse ODS Ø [in.]	1/2"
Anschlüsse ODS Ø [mm]	-
Nominaler rauminhalt [cm ³]	250
PS[bar]	50
MWP [psi] (1)	680
TS[°C] min.	-40
TS[°C] max.	+80
Verpackung	15

Notes

(1): Übereinstimmung zur UL-Zulassung