


Product Code

DF316/M12S

Solid Core Filter Drier
12mm ODS
PS = 50 bar - 680 PSI

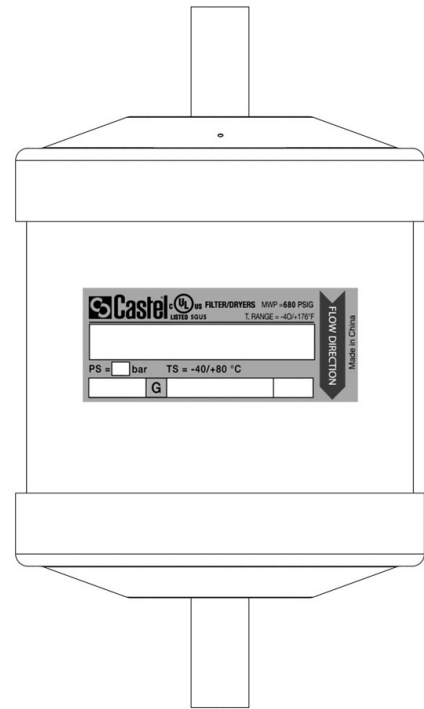

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
 HCFC (R22)
 HFC (R134a, R404A, R407C, R410A, R507)
 HFO (R1234ze)
 HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)
 HC (R290, R600, R600a, R1270)

Product details

Internationaler code	-
Anschlüsse ODS Ø [in.]	-
Anschlüsse ODS Ø [mm]	12
Nominaler rauminhalt [cm ³]	250
PS[bar]	50
MWP [psi] (1)	680
TS[°C] min.	-40
TS[°C] max.	+80
Verpackung	15

Notes

(1): Übereinstimmung zur UL-Zulassung