


## Product Code

# DF341/6

Solid Core Filter Drier  
3/4" Flare  
PS = 50 bar - 680 PSI

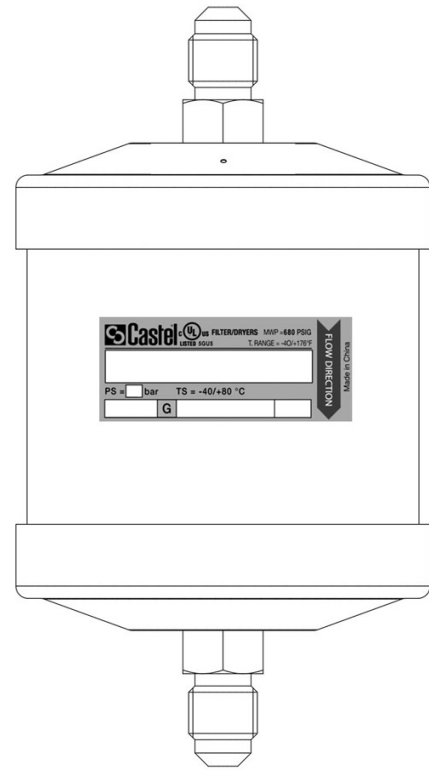

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:  
 HCFC (R22)  
 HFC (R134a, R404A, R407C, R410A, R507)  
 HFO (R1234ze)  
 HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)  
 HC (R290, R600, R600a, R1270)

## Product details

Internationaler code	416
Anschlüsse SAE Flare	3/4"
Nominaler rauminhalt [cm <sup>3</sup> ]	670
PS[bar]	50
MWP [psi] (1)	680
TS[°C] min.	-40
TS[°C] max.	+80
Verpackung	6

## Notes

(1): Übereinstimmung zur UL-Zulassung