

Product Code

**DF241/5S**


Anti-Acid Solid Core Filter Drier

5/8"-16mm ODS

PS = 50 bar - 680 PSI

**P**  **LYHEDRA**

**CL**  **ASSIC**

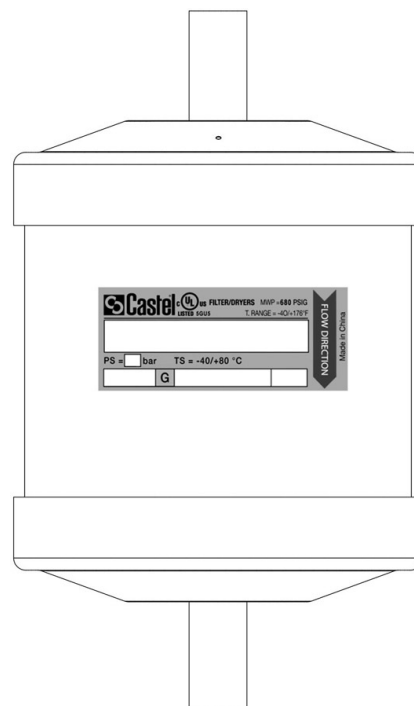

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

## Product details

Internationaler code 415S

Anschlüsse ODS Ø [in.] 5/8"

Anschlüsse ODS Ø [mm] 16

Nominaler rauminhalt [cm<sup>3</sup>] 670

PS[bar] 50

MWP [psi] (1) 680

TS[°C] Min -40

TS[°C] Max +80

Verpackung 6

## Notes

(1): Übereinstimmung zur UL-Zulassung

(2): Ohne UL-Zertifizierung