


Product Code

**9150/R78**

Orifice Assemblies  
08x2028

CLASSIC

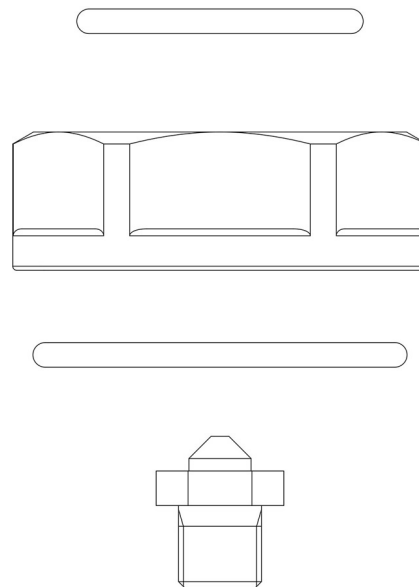

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A,  
R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

### Product details

Düseneinsatz Typ	08
Nennleistungen (1) [kW] R134a	13,57
Nennleistungen (1) [kW] R22	17,29
R404A	12,66
R507	12,66
R407C	17,67
R410A	20,75
R1234ze	10,66
R448A	16,91
R449A	16,60

*Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.*

*Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.*

R450A	11,91
R452A	13,11
R513A	11,51
R515A	10,25
R515B	10,21
Verpackung	180

## Notes

(1) Nennleistungen basieren auf:

- Verdampfungstemperatur  $T_{\text{verd}} = +5 \text{ °C}$
- Kondensationstemperatur  $T_{\text{kond}} = +32 \text{ °C}$
- Temperatur des flüssigen Kältemittels vor dem Ventil  $T_{\text{flü}} = +28 \text{ °C}$