


## Product Code

# 9150N/R64

Orifice Assemblies  
02x2028

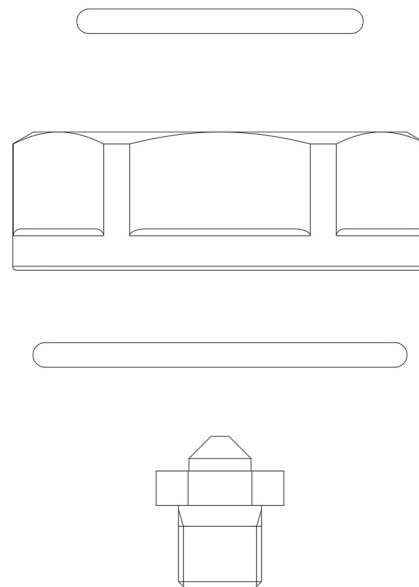

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

## Product details

<b>Düseneinsatz Typ</b>	02
<b>Nennleistungen (1) [kW] R134a</b>	1,57
<b>Nennleistungen (1) [kW] R32</b>	3,48
<b>R404A</b>	1,46
<b>R507</b>	1,46
<b>R407C</b>	2,04
<b>R410A</b>	2,40
<b>R1234ze</b>	1,23
<b>R1234yf</b>	1,16
<b>R448A</b>	1,96
<b>R449A</b>	1,92
<b>R450A</b>	1,38

R452A	1,52
R452B	2,71
R454A	1,98
R454B	2,73
R454C	1,69
R513A	1,33
R515A	1,19
R515B	1,18
R290	2,11
R600	1,34
R600a	1,39
R1270	2,37
<b>Verpackung</b>	180

## Notes

(1) Nennleistungen basieren auf:

- Verdampfungstemperatur  $T_{\text{verd}} = +5 \text{ }^{\circ}\text{C}$
- Kondensationstemperatur  $T_{\text{kond}} = +32 \text{ }^{\circ}\text{C}$
- Temperatur des flüssigen Kältemittels vor dem Ventil  $T_{\text{flü}} = +28 \text{ }^{\circ}\text{C}$