


## Product Code

# 9150N/R78

Orifice Assemblies  
08x2028

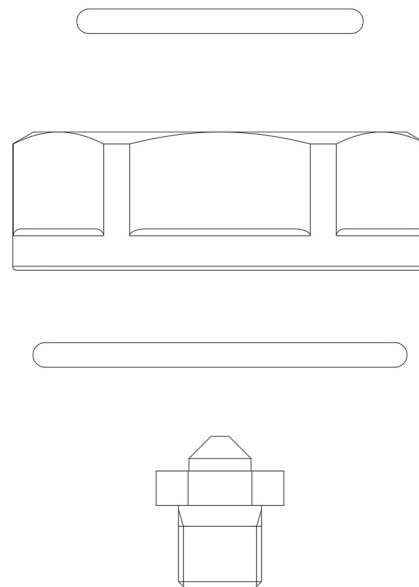

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

## Product details

<b>Düseneinsatz Typ</b>	08
<b>Nennleistungen (1) [kW] R134a</b>	13,57
<b>Nennleistungen (1) [kW] R32</b>	30,11
<b>R404A</b>	12,66
<b>R507</b>	12,66
<b>R407C</b>	17,77
<b>R410A</b>	20,75
<b>R1234ze</b>	10,66
<b>R1234yf</b>	10,00
<b>R448A</b>	16,91
<b>R449A</b>	16,60
<b>R450A</b>	11,91

R452A	13,11
R452B	23,40
R454A	17,12
R454B	23,64
R454C	14,62
R513A	11,51
R515A	10,25
R515B	10,21
R290	18,28
R600	11,60
R600a	12,00
R1270	20,46
Verpackung	180

## Notes

(1) Nennleistungen basieren auf:

- Verdampfungstemperatur  $T_{\text{verd}} = +5 \text{ °C}$
- Kondensationstemperatur  $T_{\text{kond}} = +32 \text{ °C}$
- Temperatur des flüssigen Kältemittels vor dem Ventil  $T_{\text{flü}} = +28 \text{ °C}$