

## Product Code

# 5520/E

Oil Separator  
1.5/8"m ODS  
PS = 45 bar

CLASSIC

### Product use

The oil separator intercepts the oil mixed with compressed gas and returns it to the oil reservoir or to the compressor crankcase, ensuring efficient lubrication of its moving parts. By eliminating or reducing the oil film on the condenser and evaporator heat exchange surfaces, the oil separator maintains a high heat exchange coefficient in this equipment.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

### Product details

Schweiss-anschlüsse ODS Ø [in -

Schweiss-anschlüsse ODS Ø [m -

ODM Ø [in.] -

ODM Ø [mm] -


Katalog Nr. Schweissanschluss: 5590/13 - 5590/M42

### Notes

- (1) Sind separat zu bestellen
- (2) Übereinstimmung zur UL-Zulassung

*Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.*

*Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.*

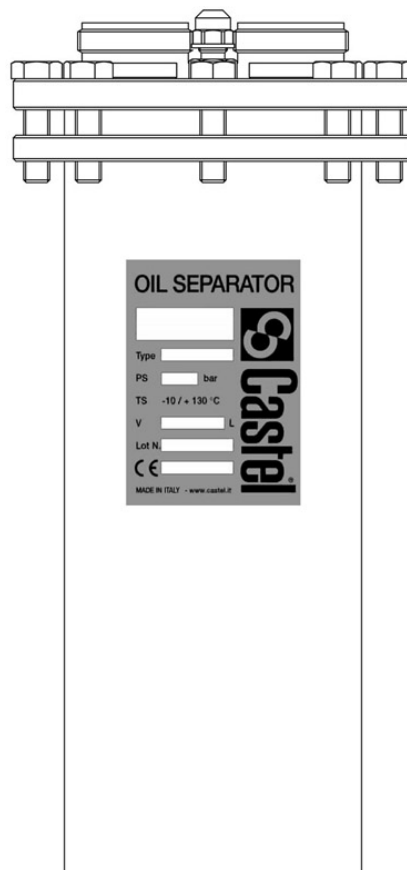

### (3) Ohne UL-Zertifizierung