


## Product Code

# OS540/5

Oil Separator  
5/8"-16mm ODS  
PS = 45 bar - 600 PSI

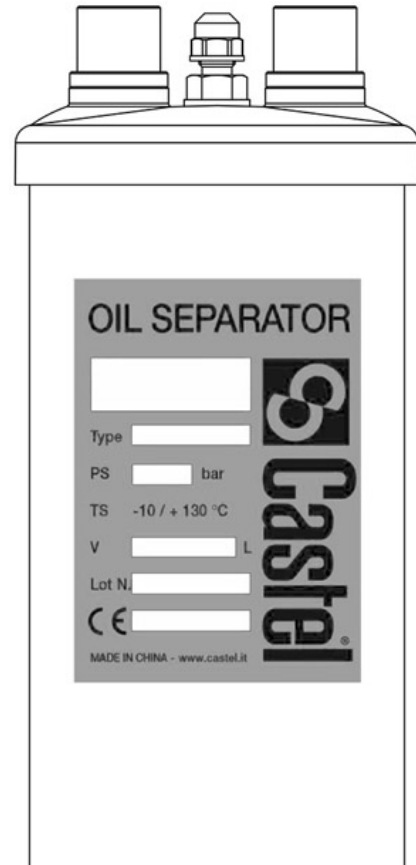

### Product use

The oil separator intercepts the oil mixed with compressed gas and returns it to the oil reservoir or to the compressor crankcase, ensuring efficient lubrication of its moving parts. By eliminating or reducing the oil film on the condenser and evaporator heat exchange surfaces, the oil separator maintains a high heat exchange coefficient in this equipment.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

- HCFC (R22)
- HFC (R134a, R404A, R407C, R410A, R507)
- HFO (R1234ze)
- HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)



### Product details

Schweiss-anschlüsse ODS Ø [in 5/8"]

Schweiss-anschlüsse ODS Ø [m 16]

ODM Ø [in.] 3/4"

ODM Ø [mm] -

Katalog Nr. Schweissanschluss -

### Notes

- (1) Sind separat zu bestellen
- (2) Übereinstimmung zur UL-Zulassung

### (3) Ohne UL-Zertifizierung