
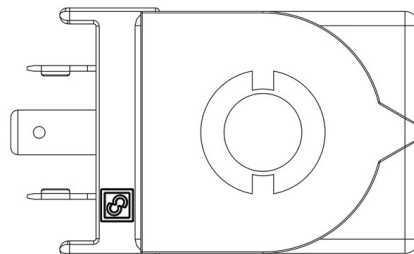


Product Code

**9100EX/RA6**

Coil Type HM2 ATEX  
220-230V 50/60Hz

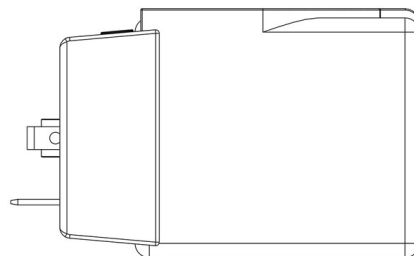

## Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

## Product details

**Spulentyp** HM2

**Spannung [V]** 220/230

**Frequenz [Hz]** 50/60

**Leistung [W]** 8

**Anschlüsse Schutz - Klasse IP 6** 9150EX/R02

**Anschlüsse Schutz - Klasse IP 6** -

**Hinweise** ATEX-Zulassung für den Einsatz in EX-Zone 2 - mit Ersatz G9151/R14 ausgestattet

**Kabellänge [m]** -

**Verpackung** 90

## Notes

(1): Spule mit Ersatz G9150/R97 ausgestattet (gelbe Mutter + schwarze Schraube + OR)