


Product Code

**3080/1C**

Fusible Plug

1/8"NPT T=79° C

PS = 42 bar

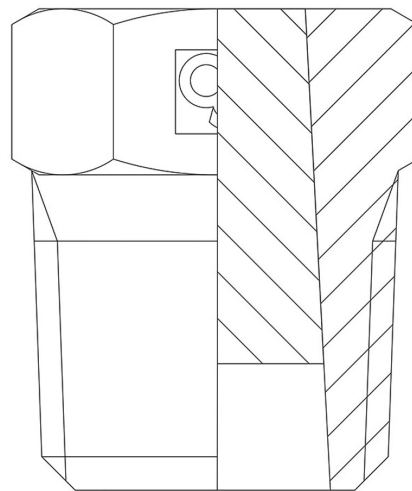

CLASSIC

### Product use

Fusible plugs are safety devices that contain a material that melts at a specific temperature and consequently vents the pressure. Safety accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)


HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Alloy melting point 79 °C for plugs in series 3080. Alloy melting point 138 °C for plugs in series 3082.

### Product details

Desenho 

N° catálogo 3080/1C

Ligações NPT 1/8"

Seção do furo [mm<sup>2</sup>] 18,8

Kd 0,91

PS[bar] 42

Temperatura de fusão [°C] 79

Temperatura máx. de exercício [ 68

Embalagem 0