


Product Code

**1078N/M12S**

Solenoid Valve  
12mm ODS w/o Coil  
PS = 50 bar

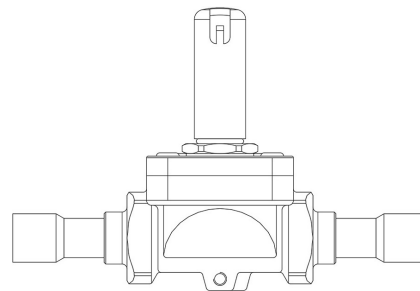

**P**  **LYHEDRA**

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:  
HFC (R134A, R32, R404A, R407C, R410A, R507)  
HFO (R1234YF, R1234ZE)  
HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)  
HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

### Product details

**Princípio de funcionamento** Servocomandocom membrana

**Desenho** img(1078N\_4S.jpg)

**N° catálogo** 1078N/M12S

**Tipo de Bobina (1)** HF2HF3HF4HM2HM3HM4CM2

**Ligações ODS Ø [in.]** -

**Ligações ODS Ø [mm]** 12

**Kv [m³/h]** 2,2

**PS [bar]** 50

**TS [°C] min.** -40

|              |      |
|--------------|------|
| TS [°C] max. | +120 |
| Embalagem    | 17   |

## Notes

(1) : bobinas que podem ser montadas nas válvulas