


Product Code

**9150C/R79**

Orifice Assemblies

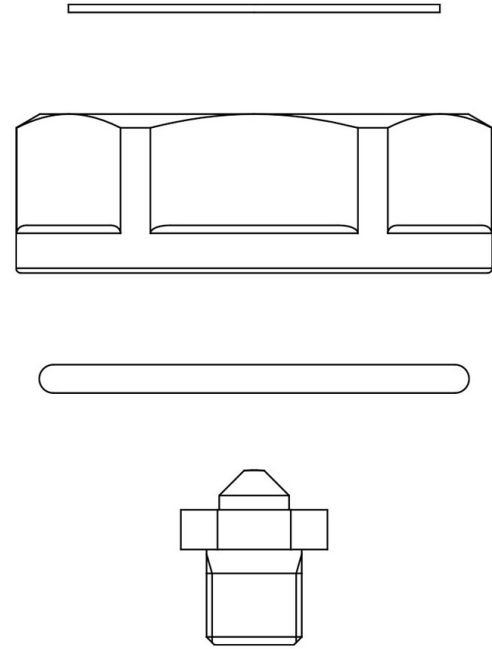

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

### Product Details

Orifice type 09

Rated capacity (1) [kW] R134a 15,05

Rated capacity (1) [kW] R22 19,17

R23 28,6

R404A 14,04

R507 14,04

R407C 19,60

R410A 23,02

R1234ze 11,82

R448A 18,78

R449A 18,40

R450A 13,21

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

R452A	14,54
R513A	12,76
R515A	11,37
R515B	11,32
Package pcs.	180

## Notes where expressly stated

(1) Rated capacities are based on:

- Evaporating temperature  $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Condensing temperature  $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Refrigerant liquid temperature ahead of valve  $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$

Rated capacities in R23 are based on:

- Evaporating temperature  $T_{\text{evap}} = - 30 \text{ }^{\circ}\text{C}$
- Condensing temperature  $T_{\text{cond}} = - 4 \text{ }^{\circ}\text{C}$
- Refrigerant liquid temperature ahead of valve  $T_{\text{liq}} = - 8 \text{ }^{\circ}\text{C}$