
Product Code

4520/2

Strainer
1/4"ODS
PS = 45 bar

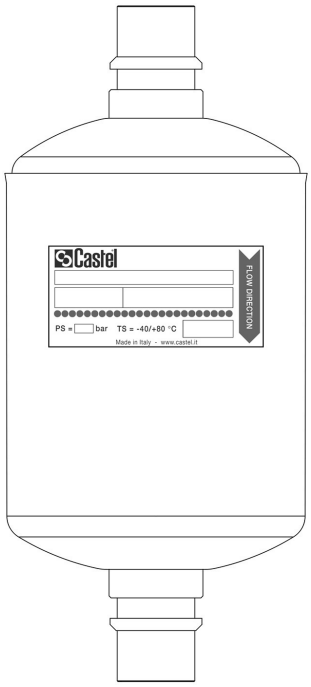

Product use

Filters for the compressor safety intake line that do not allow the replacement of the filter element.
Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
HCFC (R22)
HFC (R134A, R32, R404A, R407C, R410A, R507)
HFO (R1234YF, R1234ZE)
HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
HC (R290, R600, R600A, R1270)

Product Details

Connections SAE Flare	-
Connections ODS Ø [in.]	1/4"
ODS Ø [mm]	-
ODM Ø [in.]	3/8"
ODM Ø [mm]	-
Filtering surface [cm²]	58
Kv [m³/h]	2,4
PS [bar]	45
TS [°C] min.	-40
TS [°C] max.	+150
Package pcs	34

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.
Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.