


Product Code

**9150/R66**

Orifice Assemblies  
04x2028

CLASSIC

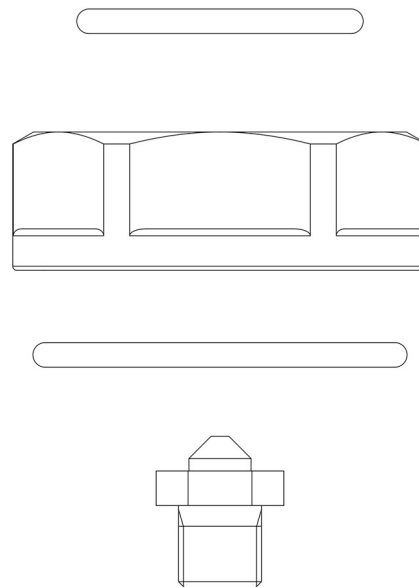

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A,  
R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

### Product details

Dibujo img(9150\_R63.jpg)

N° catálogo 9150/R66

Tipo orificio 04

Potencialidades nominales (1) [I] 3,01

Potencialidades nominales (1) [I] 3,83

R404A 2,81

R507 2,81

R407C 3,92

R410A 4,60

R1234ze 2,36

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

R448A	3,75
R449A	3,68
R450A	2,64
R452A	2,91
R513A	2,55
R515A	2,27
R515B	2,26
Paquete de n° piezas	180

## Notes

(1) Las potencialidades nominales se refieren a:

- Temperatura de evaporación  $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensación  $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura del líquido en la entrada de la válvula  $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$