


## Product Code

# 9150N/R69

Orifice Assemblies  
07x2028

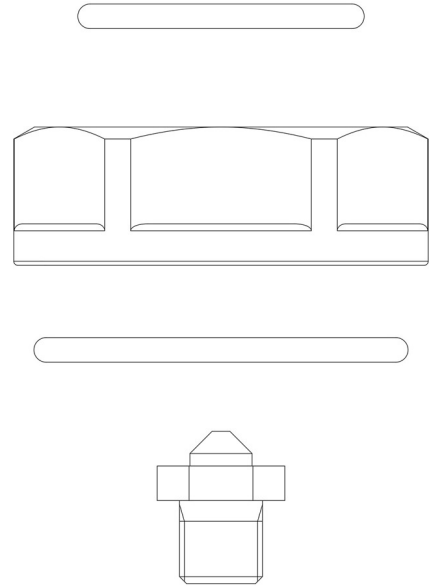

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

### Product details

Type d'orifice 07

Capacités nominales (1) [kW] R111,26

Capacités nominales (1) [kW] R2 24,98

R404A 10,51

R507 10,51

R407C 14,66

R410A 17,22

R1234ze 8,84

R1234yf 8,30

R448A 14,03

R449A 13,77

R450A 9,88

R452A	10,88
R452B	19,42
R454A	14,21
R454B	19,61
R454C	12,13
R513A	9,55
R515A	8,51
R515B	8,47
R290	15,17
R600	9,63
R600a	9,95
R1270	16,98
Emballage	180

## Notes

(1) Les capacités nominales se basent sur :

- Température d'évaporation  $T_{\text{evap}} = +5 \text{ °C}$
- Température de condensation  $T_{\text{cond}} = +32 \text{ °C}$
- Température du liquide frigorigène en amont du détendeur  $T_{\text{liq}} = +28 \text{ °C}$