


Product Code

**9150/R64**

Orifice Assemblies  
02x2028

CLASSIC

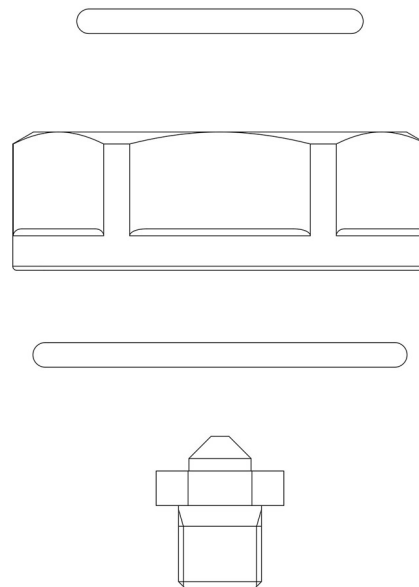

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A,  
R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

### Product details

<b>Düseneinsatz Typ</b>	02
<b>Nennleistungen (1) [kW] R134a</b>	1,57
<b>Nennleistungen (1) [kW] R22</b>	2,00
<b>R404A</b>	1,46
<b>R507</b>	1,46
<b>R407C</b>	2,04
<b>R410A</b>	2,40
<b>R1234ze</b>	1,23
<b>R448A</b>	1,96
<b>R449A</b>	1,92

R450A	1,38
R452A	1,52
R513A	1,33
R515A	1,19
R515B	1,18
Verpackung	180

## Notes

(1) Nennleistungen basieren auf:

- Verdampfungstemperatur  $T_{\text{verd}} = +5 \text{ °C}$
- Kondensationstemperatur  $T_{\text{kond}} = +32 \text{ °C}$
- Temperatur des flüssigen Kältemittels vor dem Ventil  $T_{\text{flü}} = +28 \text{ °C}$