


Product Code

**9150/R79**

Orifice Assemblies  
09x2028

CLASSIC

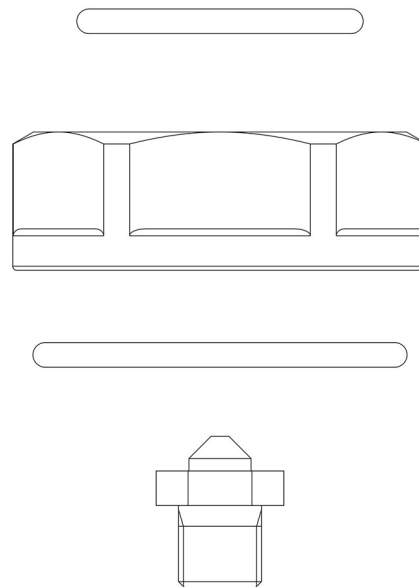

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A,  
R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

## Product details

<b>Düseneinsatz Typ</b>	09
<b>Nennleistungen (1) [kW] R134a</b>	15,05
<b>Nennleistungen (1) [kW] R22</b>	19,17
<b>R404A</b>	14,04
<b>R507</b>	14,04
<b>R407C</b>	19,60
<b>R410A</b>	23,02
<b>R1234ze</b>	11,82
<b>R448A</b>	18,76
<b>R449A</b>	18,40

R450A	13,21
R452A	14,54
R513A	12,76
R515A	11,37
R515B	11,32
Verpackung	180

## Notes

(1) Nennleistungen basieren auf:

- Verdampfungstemperatur  $T_{\text{verd}} = +5 \text{ °C}$
- Kondensationstemperatur  $T_{\text{kond}} = +32 \text{ °C}$
- Temperatur des flüssigen Kältemittels vor dem Ventil  $T_{\text{flü}} = +28 \text{ °C}$